

# Best-in-Class Expandable High-Low Bed

### PATIENT-DRIVEN FIT -



Personalized AutoTransfer Height enabled by staff control\* for safer resident-specific mobility.



**Unique 30°/45° comfort pauses** help to improve sleep, circulation and respiratory therapy adherence.



Adaptable length extensions and width expansions serve more residents.

#### PERFORMANCE -



Hand pendant with integrated hook meets the challenges of institutional care and has back-lit tactile buttons for dark rooms.



**Sleep Mode feature** saves 80% more power when bed is not in use.



Faster bed movement enables caregivers to react in a moment of need and to reduce fall hazard.

#### SAFETY -




Patented arched leg<sup>†</sup> offers industry-leading low bed height that mitigates fall injury.



**LED SafeLight\*** provides floor visibility in three soft intensities to safely get out of bed at night.



Height range of 7" to 30" reduces the risk of patient injury and caregiver back strain.

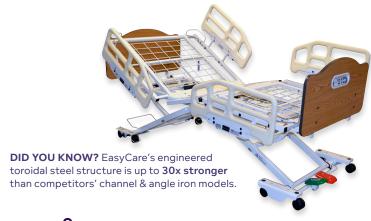



### SAFE WORKING LOAD: 600 LB

| SPECIFICATION SNAPSHOT                 |  |  |
|--|--|--|
| Frame Mobility                         | Roll-in-Low (RIL)  |  |
|  | Roll-any-Height (RAH)  |  |
| Height from Floor                      | 7" - 30"   |  |
| Dimensions (W x L)                     | 35" x 80", up to 42" x 88"   |  |
| Overall Bed Length                     | 84.25" L   |  |
| Pendant Functions                      | Back with Comfort Pause, knee, hi-low,<br>Comfort Chair, AutoTransfer, lockout<br>indicators   |  |
| Staff Control<br>Functions*            | Pendant functions and Gravity Assist,<br>Trendelenburg, reverse Trendelenburg,<br>personalized AutoTransfer Height,<br>function lockout, SafeLight control |  |
| Sleep Deck Style                       | Toroidal steel therapeutic grid  |  |
| Actuators                              | 4 actuator system  |  |
| Casters                                | Heavy-duty 3" diameter   |  |
| Horizontal Movement                    | < 1"   |  |
| Battery Backup                         | Built-in*  |  |
| WARRANTY INFORMATION (see user manual) |  |  |
| Electrical Components                  | 4-years  |  |
| Bed Frame                              | 15-years   |  |
| Welds                                  | Lifetime   |  |

Joerns® Connexio® smart network enables improved efficiency and delivery of care by empowering operators and clinicians with real time visibility of assets, staff and residents. Ready to connect your EasyCare® and UltraCare® beds?

Connexio

Connexio®
Smart Network
Care Management,
Simplified



# **Technical Specifications**

| FRAME                         |  |
|-------------------------------|--|
| Frame Mobility                | Roll-in-Low (RIL), Roll-any-Height (RAH)   |
| Mobility Lock Mechanism       | RIL: Large, High-grip Rubber Feet + Locking Casters, RAH: CareLock Dual Foot Pedals  |
| Overall Bed Length            | 84.25", 88.25", 92.25"   |
| Safe Working Load             | 600 lb   |
| Product Weight                | RIL: 220 lb, RAH: 230 lb   |
| SLEEP DECK                    |  |
| Height from Floor             | 7" - 30"   |
| Dimensions (W x L)            | 35" x 80"  |
| Width Expansion Options       | Integrated: 35", 39", 42", Fixed Width Accessory: 42"  |
| Length Extension Options      | 4",8"  |
| Angle Range                   | Back: 0 - 65°, Knee: 0 - 35°   |
| ELECTRICAL                    |  |
| Power Saving Standby Mode     | 0.5W at idle   |
| Circuit Protection            | Auto Reset Current Sensor  |
| Backup Battery Option*        | On-board Charging  |
| ADVANCECARE POSITIONING       |  |
| Standard with Backlit Control | Hi-Low, Back, Knee, One-touch Comfort Chair, One-touch AutoTransfer  |
| Back Angle Pauses             | Standard (30° and 45°)   |
| Included with Staff Control   | AdvanceCare Staff Control with Function Lockout, Programmable AutoTransfer Height, Programmable Gravity Assist and Trendelenburg/Reverse Trendelenburg, SafeLight Under-bed Light Control*, 3 level programmable |
| COMPLIANCE                    |  |
| HBSW Compliant                | Bed System   |
| Regulation Compliance         | Conforms to IEC 60601-1, 60601-1-2, and 60601-2-52   |

Specifications may vary due to manufacturing tolerances.

- \* Sold Separately
- † US Patent 6473922

### **ASSIST DEVICES**



F028 Deluxe Assist Handle



F026 Pivoting Assist Handle



F025 Assist Handle



F18 SoftCare Deluxe Assist Device



F14 Assist Device



Trapeze Patient Helper

## **ACCESSORIES**



Multiple Panel Style and Finish Options



Staff Control



LED SafeLight



Built-in Battery Backup



42" Width Expansion



4" / 8" Length Extension

