

# M22NF-HC

## SPECIFICATIONS

|                              |  |
|------------------------------|--|
| Nominal Voltage (V)          | 12V  |
| Capacity at C/100            | 51.2 Ah  |
| Capacity at C/20             | 48.4 Ah  |
| Capacity at C/5              | 41.7 Ah  |
| Weight                       | 40 lbs. (18 kg)  |
| Plate Alloy                  | Lead Calcium   |
| Posts                        | Epoxy Threaded Insert                                  |
| Container/Cover              | Flame Retardant Polypropylene<br>UL 94 V-0/>28% L.O.I. |
| Operating Temperature Range  | -40°F (-40°C) - 104°F (40°C)                           |
| Charge Voltage @ 77°F (25°C) |  |
| Cycle Float                  | 13.8 - 14.6 volts<br>13.4 - 13.6 volts                 |
| Vent                         | Self-sealing   |
| Terminal                     | Threaded Insert  |



Rated non-spillable by ICAO, IATA and DOT

Made in USA with U.S. and Imported Materials

## Valve-Regulated High Compression AGM




## DIMENSIONS

*Inches (mm)*

|        |  |
|--------|--|
| Length | 8.99 (228 mm)                              |
| Width  | 5.47 (139 mm)                              |
| Height | 8.27 (210 mm)<br><i>Including terminal</i> |

**Cycle Life vs Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity**

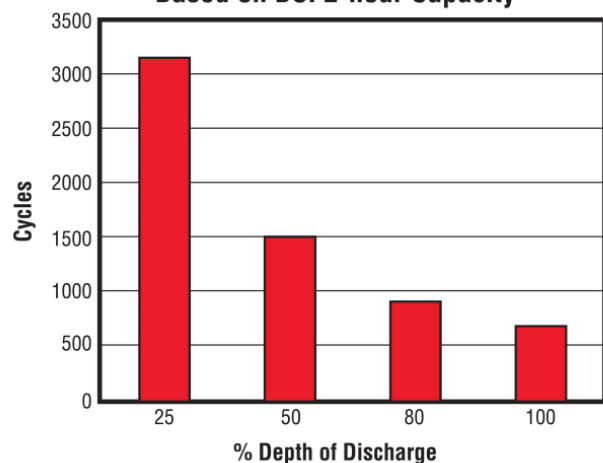

**MK Battery**

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: [sales@mkbattery.com](mailto:sales@mkbattery.com)

